

# KANTA N°2

## Specification sheet



Kanta N°2 is a three-way floor standing loudspeaker totally dedicated to performance. Kanta N°2 is equipped with a new generation IAL tweeter featuring a Beryllium inverted dome and Flax sandwich cone speaker drivers. This is an unprecedented combination of technologies to guarantee precise, detailed and warm sound. Focal's latest acoustic innovations have been integrated into these floorstanders encompassing a modern and distinctive design. These loudspeakers are perfect for rooms measuring up to 320ft<sup>2</sup> (30m<sup>2</sup>) and they're also ideal for larger rooms of up to 750ft<sup>2</sup> (60m<sup>2</sup>).



Kanta N°2, Walnut cabinet, Matt Warm Taupe and Ivory front panels

### Standard finishes

#### Cabinet



Black High Gloss

#### Cabinet



Wood Veneer

#### Front Panel (High Gloss finishes)




Gauloise Blue

Carrara White

Black Lacquer

Solar Yellow

#### Front Panel (Mat finishes)

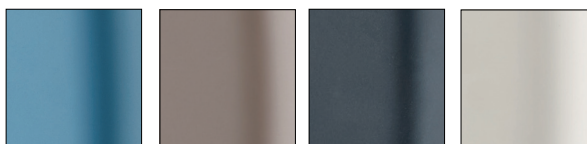

Gauloise Blue

Warm Taupe

Dark Grey

Ivory

### Key points

- Transducers integrating Focal's latest technologies
- Speaker drivers developed and manufactured in France by Focal
- Numerous standard finishes

# KANTA N°2

## Specification sheet

### Technical specification

<b>Type</b>	<b>3 way bass-reflex floor standing loudspeaker</b>
<b>Drivers</b>	Two 6 <sup>1/2</sup> " (16.5cm) Flax woofer with NIC motor 6 <sup>1/2</sup> " (16.5cm) Flax midrange with TMD suspension and NIC motor 1 <sup>1/16</sup> " (27mm) 'IAL3' pure Beryllium inverted dome tweeter
<b>Sensitivity (2,83V/1m)</b>	91dB
<b>Frequency Response (+/-3dB)</b>	35Hz - 40kHz
<b>Low Frequency Point (- 6dB)</b>	29Hz
<b>Nominal Impedance</b>	8Ω
<b>Minimum Impedance</b>	3.1Ω
<b>Recommended Amplifier Power</b>	40 - 300W
<b>Crossover Frequency</b>	260Hz - 2,700Hz
<b>Dimensions (HxWxD)</b>	44 <sup>1/64</sup> x 12 <sup>41/64</sup> x 18 <sup>25/32</sup> " (1,118 x 321 x 477mm)
<b>Net weight (with front grille)</b>	77.2lbs (35kg)
<b>Packaging dimensions (HxWxD)</b>	49 <sup>39/64</sup> x 16 <sup>17/32</sup> x 27 <sup>11/64</sup> " (1,260 x 420 x 690mm)
<b>Total weight (including packaging)</b>	88.2lbs (40kg)